


PEAK 712VL2(G)

Full-size Socket 478 Intel® Pentium® 4 Processor
CPU Card w/VGA/Dual LAN/DDR

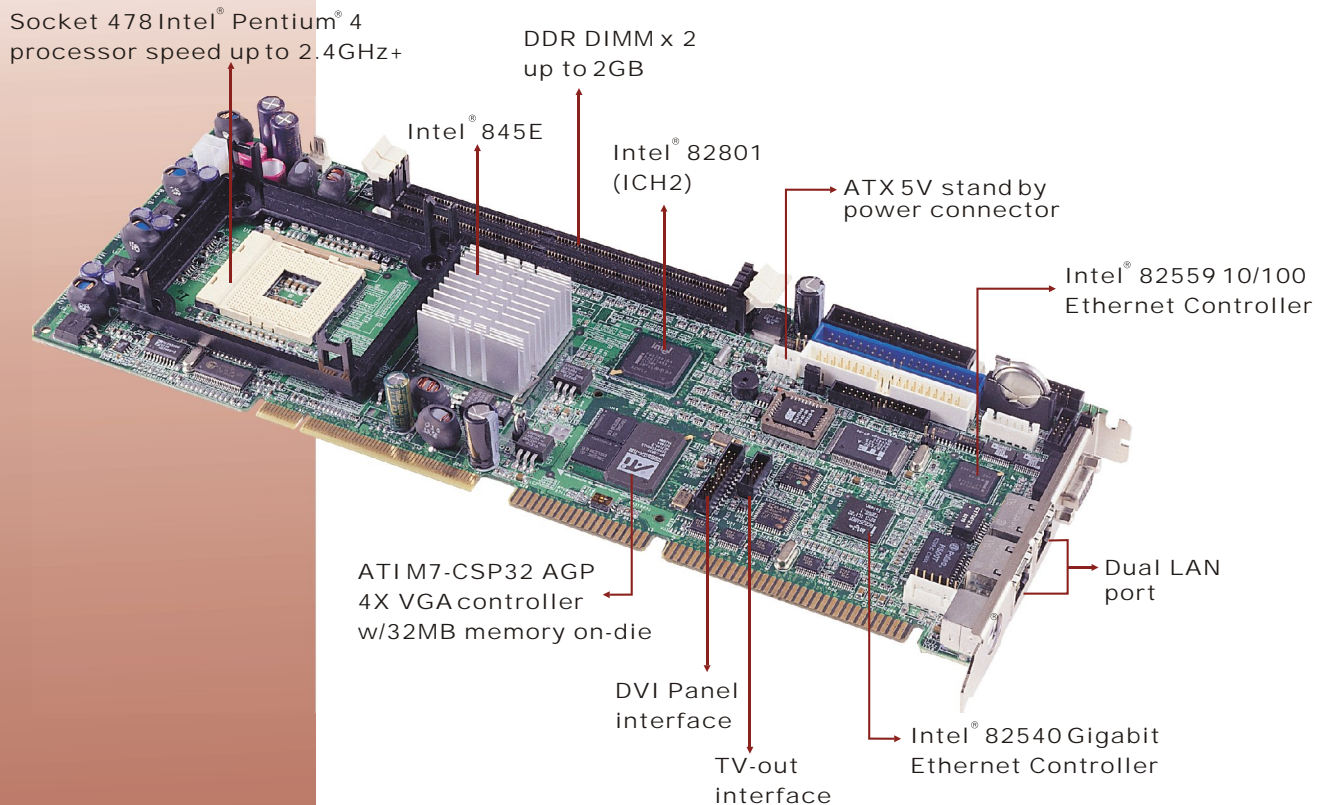

Features

- ◆ Socket 478 Intel® Pentium® 4 processor with 400/533MHz system bus up to 2.4GHz+
- ◆ Max. 2GB DDR SDRAM, DDR DIMM x2
- ◆ Intel® 845E/ICH2 chipsets
- ◆ ATIM7-CSP32 AGP 4X VGA controller w/32MB memory on-die
- ◆ Intel® 82559 Ethernet x2 (for PEAK 712VL2) or Intel® 82559 x1 + Intel® 82540 x1 GigaBit Ethernet controller (for PEAK 712VL2G)



<http://www.nexcom.com>

Headquarters/
NEXCOM International Co., LTD.
18F, No. 716, Chung-Cheng Road, Chung-Ho,
Taipei Hsien 235, Taiwan, R.O.C.
Tel: 886-2-8228-0500
Fax: 886-2-8228-0506
e-mail: nexcom@nexcom.com.tw

Europe/
NEXCOM (UK) LTD.
Cromwell Business Center
12 Howard Way, Newport Pagnell,
Milton Keynes, MK 16 9QS U.K
Tel: 44-1908-21 88 77
Fax: 44-1908-21 88 67
e-mail: sales@nexcomuk.co.uk

USA/
NEX Computers Inc.
46706 Fremont Blvd.
Fremont, CA 94538, U.S.A
Tel: 1-510-656-2248
Fax: 1-510-656-2158
e-mail: sales@nexcom.com

Japan/
NEXCOM Japan Co., LTD.
10F, Nakagin-Shiroyama Bldg. 8-16-13,
Ginza Chuou-ku Tokyo, Japan 104-0061
Tel: 81-3-3524-4250
Fax: 81-3-3524-4252
e-mail: sales@nexcom-jp.com

PEAK 712VL2(G)

Specifications

System Architecture

- Full size SBC with PICMG (PCI+ISA) Golden finger
- AGP 2.0 compliant
- PCI V2.2 compliant
- PICMG 1.0 (Rev.2.0) compliant

CPU Support

- Intel® Pentium 4 processor with 256K/512KL2 cache on die
- Socket 478 CPU featuring 400MHz/533MHz system bus, CPU speed up to 2.4GHz or above

Main Memory

- DDR DIMM x2 Support Max Memory size up to 2GB(DDR200/DDR266)
- ECC support (single bit error correction/Multiple bit errors reporting)
- Only support unbuffered DIMM

BIOS

- Award System BIOS
- Plug & Play support
- Advanced Power Management support
- Advanced configuration & Power Interface support
- 4M bits flash ROM

Chipsets

- Intel® 845E (MCH)
- Intel® 82801x 1 I/O Controller Hub (ICH2)
- Firmware Hub (FWH) 4M bits flash ROM x1
- PCI V2.2 compliant

On Board LAN

- Intel® 82559 Ethernet controller x2 for PEAK 712VL2
- Intel® 82559 controller x1 + Intel® 82540 controller x1 for PEAK 712VL2G
- 10 Base T/100 Base TX support, full duplex; Intel® 82540 support for 10 Base T/100 Base TX (1000 Base-T for PEAK 712VL2G only)
- Compliant with PCI V2.1/V2.2, IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3y, IEEE802.3ab
- Drivers support: DOS/Windows®, Windows® 95/98/2000, Windows® NT, Netware 5.0, Linux
- RJ45 with LED connector x2

On Board VGA

- ATI M7-CSP32 VGA Controller, 1.5V AGP 4X Interface
- 32MB VGA Memory on die
- Fully PC 98, PC 99, PC 2001 Compliant
- 15 pin CRT connector x1
- DVI (TMDS) box header x1
- TV-out pin header x1
- Support dual independent display (DVI/CRT, DVI/TV, CRT/TV)

On Chip I/O (ICH2)

- On board USB port x2
- Ultra DMA33/66/100 support, 40-pin connector x2. Two pins power connector for DOM (Disk On Module)

On Board I/O

- ITE 8712F-A Super I/O
- SIO x2, with 2 x 16C550 UARTs, 10-pin header x2
- PIO x1, bi-directional, EPP/ECP support, 26-pin connector x1
- Floppy Disk controller: 34-pin connector x1
- 6-pin mini DIN connector x1, for PS/2 keyboard/mouse, 5-pin connector x1 (for external keyboard)
- On Board buzzer x1

- GPIO (4 in 4 out)
- On board 2-pin header for I²C
- On board 2-pin header for reset SW / 2-pin for IDE active LED / 2-pin ATX power SW
- One 3-pin power header for 3-pin Power Cable connect to Backplane Board to support ATX Power On function.
- On board 4-pin Additional Power Source Input
- AC97 output, 10-pin header x1

System Monitor

- Derived from Super IOITE 8712F-A to support system monitor.
- 8 voltage (For +1.8V, +3.3V, +5V, -5V, +12V, -12V, Vcore and Vcc5V Stand-By)
- One Fan speed for CPU
- Temperature sensor header x2 (one for CPU internal use, another for external system use)

ACPI Function

(only when 3-pins Power cable connect to Backplane which connect with ATX Power Source)

- Soft Power off
- Power On by LAN
- Power On by Keyboard
- Power On by Ring

Real Time Clock

- On chip RTC with battery backup
- External Li Battery x1

Watchdog Timer

- Watchdog timeout can be programmable by Software from 1, 2, 4, 8, 16, 32, 64 seconds

PCI to ISA Bridge & ISAMAX Support

- ITE 8888F x1 PCI to ISA Bridge
- Provide 64mA high driving capability to maximize ISA signals for support ISA cards up to 20 on the backplane ISA Slot.

Dimensions

- 338.58mm(L) x 122mm(W)

Power Requirements

Voltage	Maximum
+5V	12A
+12V	12A
-12V	500mA

Environments

- Operating temperatures: 0°C to 60°C
- Storage temperatures: -20°C to 80°C
- Relative humidity: 10% to 90% (Non-condensing)

Certification

- CE approval
- FCC Class A

Order Information

PEAK 712VL2

- Full-size Socket 478 Intel® Pentium® 4 Processor CPU Card w/VGA/DDR/Dual LAN (Intel® 82559 + Intel® 82559)

PEAK 712VL2G

- Full-size Socket 478 Intel® Pentium® 4 Processor CPU Card w/VGA/DDR/Dual LAN (Intel® 82559 + Intel® 82540)