


BBS-2015

High Speed, Box PC with CF, 12V DC Adapter or 80W P/S

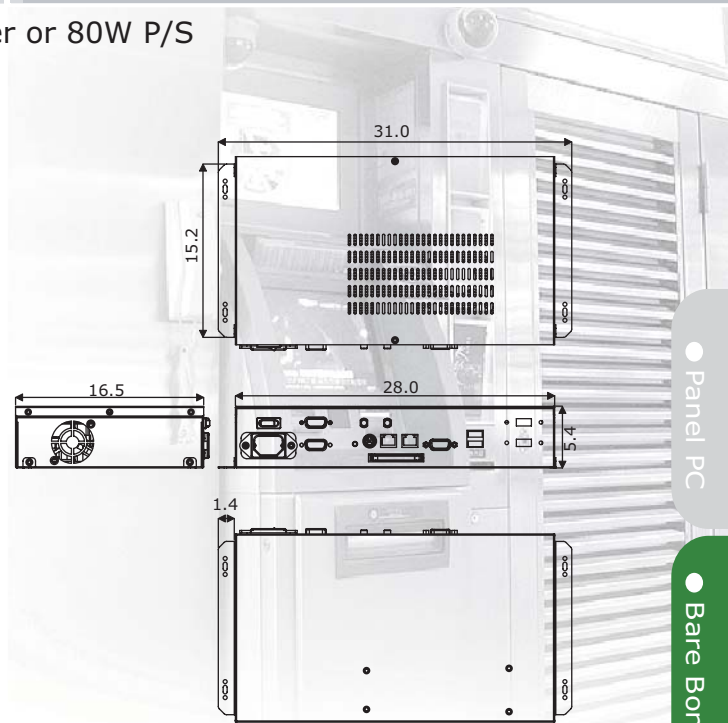

Features

- High Speed, box PC design
- Built-in HS-2620, 12V DC adapter or 80W P/S
- Provides Intel® Core™ 2 Duo Mobile processor (option)
- 1 x 2.5" HDD space
- 2 x 4cm ball bearing cooling fan
- BBS-2015-Z provides CF, 2 x COM, 4 x USB2.0

System

SBC Model

HS-2620

CPU

Intel® Core™ 2 Duo Mobile processor T7700, T7500, T7300, T7100 (option)

BIOS

Award BIOS with 8Mb SPI ROM

System Chipset

Intel® GME965/ICH8-M

System Memory

1 x 200-pin SO-DIMM socket up to 2GB DDR2 SDRAM

Display Chipset

Intel® GME965

Audio Chipset

RealTek ALC883 7.1CH 3D audio interface

Ethernet Chipset

Dual RealTek RTL8111B 10/100/1000 Mbps LAN

Drive Bay

1 x 2.5" HDD space

Storage

1 x Type II CF socket

Watchdog Timer

Reset: 1 sec.~255 min. and 1 sec. or 1 min./step

Mechanical

Thermal System

2 x 4cm ball bearing cooling fan

Dimensions (LxHxW)

28.0 x 5.4 x 16.5 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Power In

12V DC in 84W adapter (DC Version)


100~240V AC in 80W power supply (AC Version)

I/O Interface

External I/O

2 x COM, MIC In, Line Out, PS/2 KB/MS, 2 x LAN, CF, VGA, 4 x USB2.0

Rear I/O

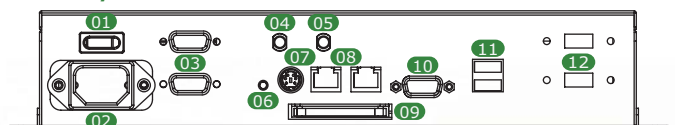

- | | | |
|----------------------------|------------------|----------------|
| 01. Main Power ON/OFF | 05. Line Out | 09. CF |
| 02. AC In or DC Adapter In | 06. Reset Button | 10. VGA |
| 03. COM 1/COM 2 | 07. KB/MS | 11. USB2.0 * 2 |
| 04. MIC In | 08. LAN * 2 | 12. USB2.0 * 2 |

Ordering Guide

BBS-2015-Z9 (DC)

Box PC with HS-2620(w/CF), 12V DC Adapter

BBS-2015-Z9 (AC)

Box PC with HS-2620(w/CF), 80W P/S

Accessory Options

CPU, Memory Module, CF Module, 2.5" HDD, Wallmount kit