



Main Features

- ◆ Support Intel® Core™ 2 Quad, Core™ 2 Duo, Celeron® Processor
- ◆ Intel® GM45 with GMA4500MHD Graphic Engine
- ◆ 2x 240-pin DDR3 DIMM socket, up to 8 GB non-ECC 1066 MHz DRAM
- ◆ 2x Intel® 82574L PCI Express Gigabit Ethernet
- ◆ 1 x Realtek ALC888 HD CODEC
- ◆ 6 x USB 2.0, 4 x Serial port, 4 x SATA
- ◆ 1 x PCI Slot/ 1 x PCI 104+ slot

Product Overview

The EBC 545 is a 5.25" form factor embedded utilizing Intel® Core™ 2 Quad, Core™ 2 Duo and Celeron® 575 Processor. EBC 545 features Intel® GM45 and ICH9-M chipsets, which supports DDR3 1066 MHz DRAM. The multi expansion features via PCIe x1, PCI and PC 104+ for different application at your system device.

The EBC 545 embedded board supports a various operation systems such as Windows7 embedded, Windows XP embedded, Win CE and Linux.

Specifications

CPU Support

- ◆ Intel® Core™ 2 Quad (Q9100 2.26GHz) (non longevity CPU)
- ◆ Intel® Embedded Processor List (Intel® Longevity CPU):
Intel® Core™ 2 Duo (T9400 2.53GHz)
Intel® Celeron® 575 2.0GHz

Main Memory

- ◆ 2 x 240-pin DDR3 DIMM Socket, up to 8GB non-ECC 1066 MHz DRAM

Chipset

- ◆ Intel® GM45
- ◆ Intel® ICH9-M

BIOS

- ◆ Award System BIOS
- ◆ PnP and ACPI support
- ◆ 8M bits SPI ROM

On-board LAN

- ◆ 2 x Intel® 82574L PCI Express GbE
- ◆ Support PXE and Wake on LAN (When 5Vsb available) (LAN1,LAN2 both)
- ◆ 2 x RJ45 (180°/90° option)


Display

- ◆ Intel® GM45 integrated GMA4500MHD Graphic engine
- ◆ Analog VGA Interface:
One 2x10 2.0mm box header
Resolution up to 1600 x 1200 at 85 Hz, 2048 x 1536 at 75Hz
- ◆ LVDS1 Interface:
2 x DF13 20-pin LVDS connector for internal connection support single (24bit) or dual pixel (48bit) LVDS panel
- ◆ LVDS2 (Through SDVOB w/ CH7308B) Interface:
2 x DF13 20-pin LVDS connector for internal connection support single (24bit) or dual pixel (48bit) LVDS panel
- ◆ SDVO Interface (one 30-pin box header):
EBK SDVO1 (SDVOC w/ CH7307C DVI transmitter w/ DVI-Single link output)
EBK SDVO2 (SDVOB w/ CH7307B DVI for LVDS output)
- ◆ CCFL Interface:
2 x CCFL for Panel Backlight Inverter
- ◆ Composition:
VGA+LVDS
VGA+DVI
LVDS+DVI
LVDS1+LVDS2

Audio

- ◆ Realtek ALC888 HD CODEC
- ◆ 1 x Mic-in/1x Line out

Block Diagram

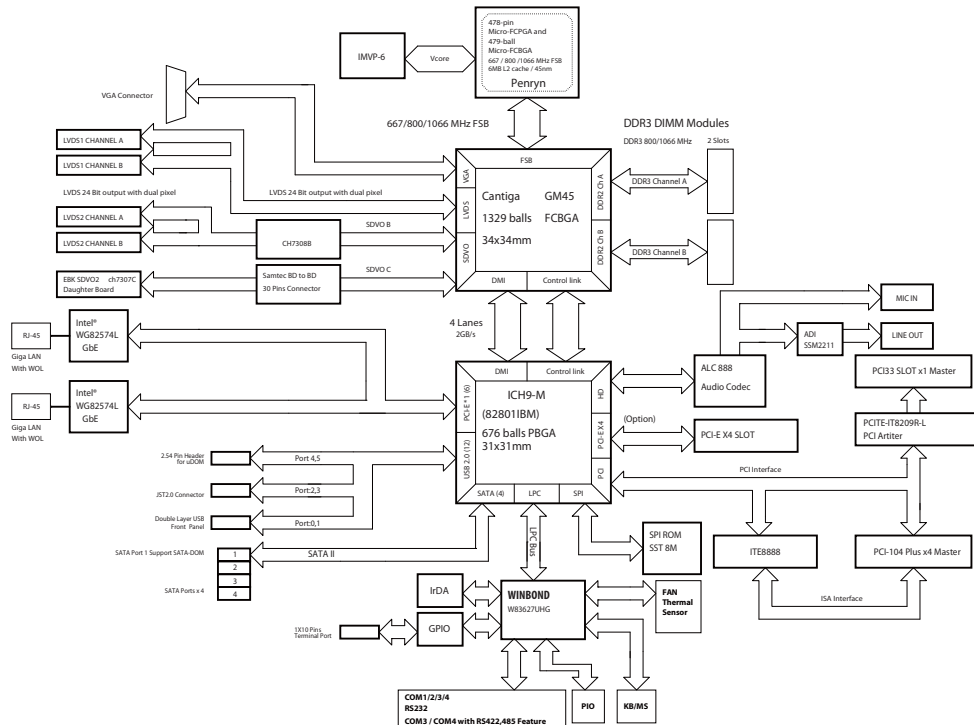

Expansion

- 1 x PCIe x1
- 1 x PCI
- 1 x PC 104+

I/O Interface

- Serial port: 3 x COM support RS232 and 1 x COM support RS232/RS422/RS485 (BIOS setting)
- Parallel port: 1 x 26-pin box header
- USB 2.0: 6x ports, 2 x edge ports, 2 ports by JST, 1 x pin header for uDOM
- 8 GPIO lines via header (GPIO 0~3 and GPIO0~3) TTL Level (0/5 V)
- 2 x 2-pin 2.54mm header for Power LED/HDD Power LED
- 1 x 4-pin and 1 x 3-pin Fan connector
- 1 x PS/2 KB/MS via pin header
- On board Buzzer/SMBus2.0 /Reset SW
- 1 x 5-pin header for IrDA

Watchdog Timer

- WDT can be programmable by Software from 1 sec to 255 sec and from 1 min to 255 minutes (Tolerance 15% at 25°C)

Storage

- 2 x SATA port (support SATA-DOM)
- 1 x CF socket

System Monitor

- Monitoring of 5 voltages and 2 temperatures
- 5 Voltage (+5V, Vcore, +12V, +3.3V, +1.5V)
- 2 Temperatures (CPU, External Temperature)

Power Requirements

- Supports both AT and ATX Mode (default setting is ATX mode)
- ATX mode:
2x5pin ATX power connector w/ +12V/-12V/+5V/5Vsb Power In
2x2pin power connector +12V Power In for PCIe x16 Card
At ATX Mode, the BIOS setting is as follow:
POWER -SUPPLY TYPE: [ATX]
AUTO PWR-FAILURE RESUME: [ON]

- AT mode:
2x5pin ATX power connector w/ +12V/-12V/+5V Power In
No Power On push Button, Software Shutdown function and LAN remote wake up

Dimensions

- 5.25" form factor/203mm (L) x 146mm (W) (7.9" x 5.7")

Environment

- Operation temperatures: -20°C to 60°C
- Storage temperatures: -20°C to 85°C
- Humidity: 10% to 90%, non condensing

Certifications

- CE approval
- FCC Class A

Ordering Information

- **EBC 545 (P/N: 10E00054500X0)**
5.25" Intel® Core™ 2 Quad, Core™ 2 Duo/Celeron® Embedded CPU Board with Dual Display/1x PCI /1 x PC104+/2x GbE
- **EBKSDVO1 (P/N: 10E0SDVO100X0)**
CH7307C daughter board w/ DVI-Single link for DVI output
- **EBKSDVO2 (P/N: 10E0SDVO200X0)**
CH7308B daughter board for LVDS output
- **Packing List**

Part No.	Description
60233USB59X00	USB CABLE
60233POW73X00	POWER CABLE (2x10 TO 2x5)
60233MK202X00	PS2 Y CABLE
6023309402X00	COM CABLE L: 300mm
60233PRT15X00	PRINT CABLE
60233ATA17X00	SATA CABLE
60233POW22X00	POWER CABLE (BIG 4P)